



Home Office

Home Office Body Armour Standard 2017 – INITIAL Certification: Test House SOP Guidance

May 2025 – Version 1.0



© Crown copyright 2025

This publication is licensed under the terms of the Open Government Licence v3.0 except where otherwise stated. To view this licence, visit nationalarchives.gov.uk/doc/open-government-licence/version/3 or write to the Information Policy Team, The National Archives, Kew, London TW9 4DU, or email: psi@nationalarchives.gov.uk.

Where we have identified any third party copyright information you will need to obtain permission from the copyright holders concerned.

Any enquiries regarding this publication should be sent to us at PEDwebsite@homeoffice.gov.uk.

Contents

Introduction	2
Process for INITIAL Armour Testing	3
Appendix 1	6
Appendix 2	7
Results recorded for BAS17 testing.	7
Stab/Spike	7
Ballistic	8
Annex 1	9
BAS17 Initial Process maps	9

Introduction

This document is to act as a guidance in the Body Armour testing process to the Home Office Body Armour Standard 2017 (Pub. 012/17) for accredited test houses. It is to be used in conjunction with the Standard and covers the processes outside of those listed in that document.

Process maps are located in the Annex to this SOP.

Process for INITIAL Armour Testing

1. Manufacturer contacts Test House and agrees a test date.
2. Manufacturer sends Test House the technical file, proforma (Ref: BAS17#01) and technical file review document (Ref: BAS17#02). Technical file will include:
 - a. Photographs of armour construction and stitching to aid in test house construction checks.
3. Test House will check:
 - a. Technical file proforma (BAS17#01) details are present and correct,
 - b. Technical file details are present and correct as per the guidance in the technical file review document (Ref: BAS17#02) (Including that the most recent certificate has been included with the technical file) and complete review document to confirm data present.
4. Lab manager will review technical file and technical file review document to check no issues have been missed.
 - a. Any issues or missing information must be reported back to the manufacturer. Await correction before proceeding with testing.
5. Once all details are present and correct proceed with testing.
6. Testing should be completed as per the requirements of the standard including the approved BAS17 amendments noted on the Police Equipment Database (PED). If unfair strikes are performed, additional panels should be tested. (See BAS17 Section 6.1.2, 6.1.3, 7.1.2 and 7.1.3)
7. Results obtained are checked to ensure that they meet all the requirements of the standard (Appendix 2).
 - a. Critical Perforation Analysis (CPA) results calculated using CPA tool following the CPA tool guidance document.
 - b. Areal Density calculated using:

$$\text{Areal Density (kg.m}^{-2}\text{)} = \left(\frac{\text{mass of armour (kg)}}{\text{mass of paper (kg)}} \right) \times \text{areal density of paper (kg.m}^{-2}\text{)}$$
 - c. Construction checks will be completed only by staff signed off as competent to do so and carried out on all test panels including CPA panels. If the construction does not match the Declaration, then the manufacturer and Home Office (HO) should be notified immediately.

- d. Photographs must be taken of the construction and form part of the Test Results to be sent to Home Office.
 - e. Where applicable (ballistic tests), Mean Back Face Signature (BFS):
 - i. For HO1/HO2 – Calculated only from shots on medium panels with MEN DM11A2B2 ammunition.
 - ii. For HO3/HO4 – Calculated only from shots with 7.62 surrogate ammunition.
 - f. Where applicable (Stab testing – knife) Depth of penetration (DoP) calculated as the mean average from each energy level, Medium Panels only.
8. Lab manager reviews and checks all results to ensure all thresholds of the standard have been met.
9. If all found to be correct and within acceptable ranges a conformation of accreditation can be drafted using the CoA template (BAS17#06).
- a. A unique CoA number will be generated using the naming convention below. The test house identifier is dictated in Appendix 1, the unique test number is selected by the test house:

Test house Identifier/INIT/unique test number/date of testing.
 - b. If testing is carried out over multiple dates the first day of testing should be used.
10. Lab manager reviews and checks CoA.
11. CoA summary sheet (BAS17#07) is signed off by lab manager confirming all testing is completed and has met the requirements of BAS17.
12. If armour meets the requirements with no issues, CoA, CoA summary, TFR document and full Test Results (BAS17#02, BAS17#03, BAS17#06, BAS17#07) including photographs of construction provided to Home Office (e-mail: PEDwebsite@homeoffice.gov.uk).
- Note: The CoA and CoA summary must not be sent to the manufacturer.**
13. If results fail to meet requirements of the Standard, the manufacturer is informed.
- a. The Model number of a failed armour cannot be used again.
14. The non-conformance form (BAS17#08) will be generated using the template and sent to the Home Office with a copy of Test Results and TFR document (BAS17#03, BAS17#02) (e-mail: PEDwebsite@homeoffice.gov.uk)
15. All results will be stored in accordance with agreed documents retention timelines.

Abbreviations

Abbreviation	Full Version
BAS17	Body Armour Standard 2017
BFS	Back Face Signature
CoA	Confirmation Of Accreditation
CPA	Critical Perforation Analysis
DoP	Depth of Penetration
HO	Home Office
ILM	In Life Monitoring
PED	Police Equipment Database
PQT	Production Quality Test
TFR	Technical File Review
SOP	Standard Operating Procedure

Appendix 1

Test House	Unique Test House Identifier
Cranfield University	CRA
Elements Belcamp	BEL
Elements Wichita	WIT
TNO	TNO

Appendix 2

Results recorded for BAS17 testing.

Required for all:
Manufacturer
Model
Threat Level
Lot Number
Batch Number
Date of Manufacture
Test Date
Test Technicians
Test House reference (Test house Identifier/(INIT/PQT/ ILM)/unique test number/date of testing)
Test Type (Initial, PQT etc.)

Stab/Spike

Formed	Unformed
Humidity	Humidity
Temperature	Temperature
Plastiline 40 calibration drops x2	Composite Back drop rebound height x3
Energy	Energy
Mean Energy	Mean Energy
Velocity	Velocity
Mean Velocity	Mean Velocity
Orientation of strike	Orientation of strike
Held/Penetrated	Held/Penetrated
Depth of Penetration	Depth of Penetration
Mean Depth of Penetration	Mean Depth of Penetration
Areal Density	Areal Density
Construction Check	Construction Check

Ballistic


Formed	Unformed	Plate
Humidity	Humidity	Humidity
Temperature	Temperature	Temperature
Plastiline 40 calibration drops x2	Roma Plastilina No 1 Drops x3	Roma Plastilina No 1 Drops x3
Range/Distance (m)	Range/Distance (m)	Range/Distance (m)
Velocity	Velocity	Velocity
Mean Velocity	Mean Velocity	Mean Velocity
BFS	BFS	BFS
Mean BFS	Mean BFS	Mean BFS
Angle of strike	Angle of strike	Held/Perforated
Held/Perforated	Held/Perforated	Areal Density
Areal Density	Areal Density	CPA
Construction Check	Construction Check	
CPA	CPA	

Annex 1

BAS17 Initial Process maps

Process Maps: Pages 10-14

BAS17 Initial Certification Overview

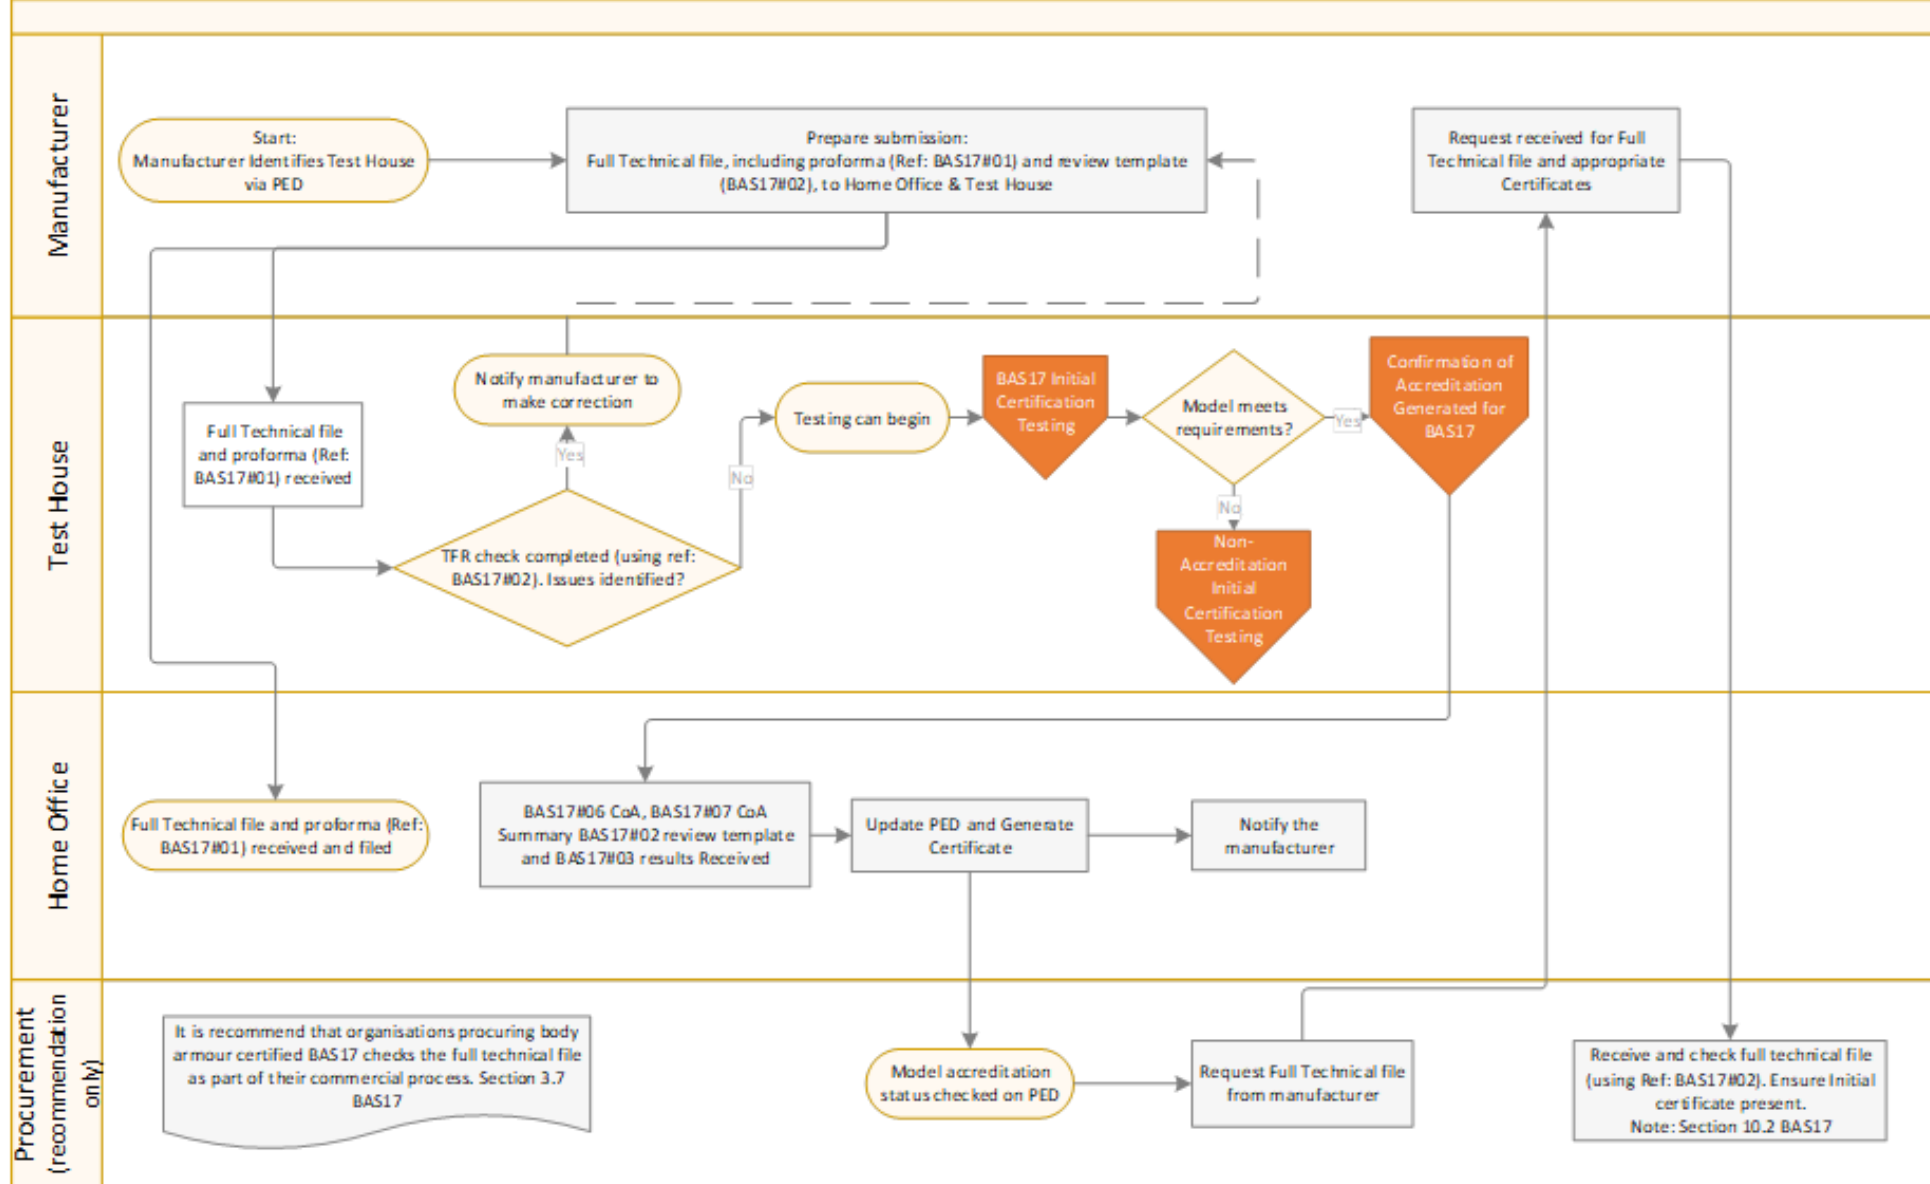

BAS17 Initial Testing

